


Hollow Ram, Double acting hydraulic jack

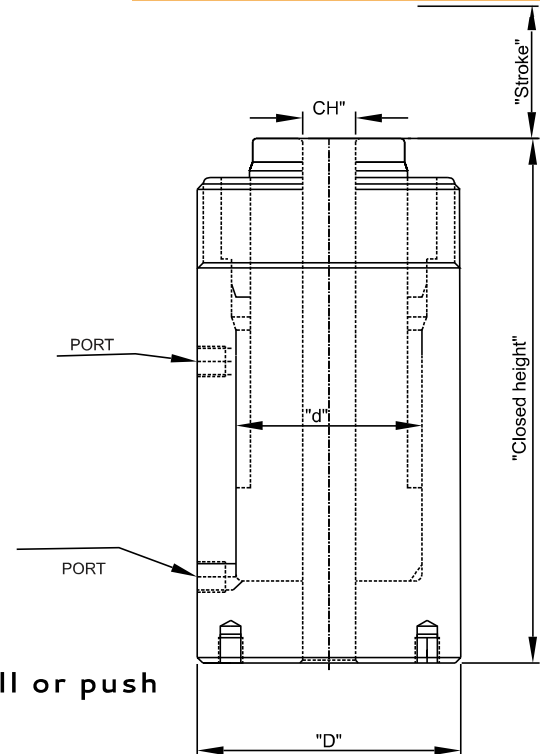

Features:

- Multipurpose jacks.
- Hydraulic puller with mechanical fixture, for pull or push usage.
- Base mounting & collar threads are optional
- Maintenance fabrication, sugar Ind. & etc.
- HardChrome plating to avoid corrosion score mark.
- Used in vertical and horizontal directions.
- Maximum working pressure @700 BAR.

Model	Capacity	Stroke	Close Height	C'Hole Dia	Cylinder OD (D)	Cylinder ID (d)	Ram OD	Weight (Approx)
	ton	mm	mm	mm	mm	mm	mm	kg
MHD	10	75	210	20	75	50	40	6
MHD	10	100	235	20	75	50	40	6.8
MHD	20	50	205	27	100	70	60	11.5
MHD	20	100	255	27	100	70	60	14
MHD	30	50	220	33	115	85	70	15.5
MHD	30	100	270	33	115	85	70	19
MHD	50	100	280	42	140	110	90	27
MHD	60	75	265	54	155	125	100	31
MHD	60	100	290	54	155	125	100	33.5
MHD	100	75	295	77	210	170	130	60
MHD	100	100	320	77	210	170	130	64
MHD	150	150	375	80	245	200	150	104
MHD	200	150	400	80	290	200	160	164

Note:-

- Higher capacity customized solutions on request.
- Plating or painting on demand.