


Threaded ram, Single acting, Spring return hydraulic jack

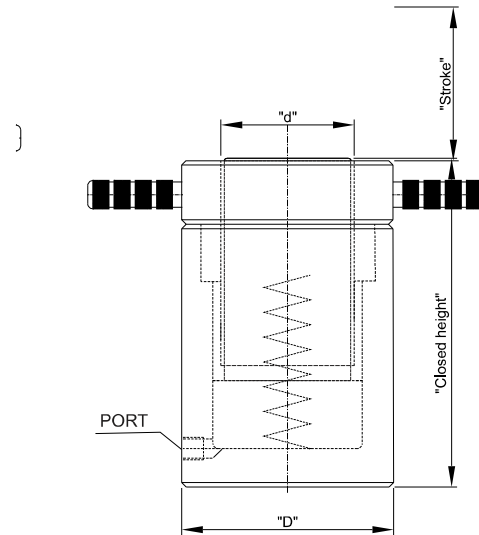

Features:

- Multipurpose jacks.
- HardChrome plating to avoid corrosion score mark.
- Mechanical safety lock nut to sustain load on lock nut for longer period.
- Spherical saddle reduces damage to jack against off-center load.
- Used in vertical and horizontal directions.
- Maximum working pressure @700 BAR.

Model	Capacity	Stroke	Close Height	Cylinder OD (D)	Cylinder ID (d)	Ram OD	Weight (Approx)
	ton	mm	mm	mm	mm	mm	kg
MST	10	150	245	60	45	45	4.5
MST	15	150	250	70	55	55	6.5
MST	20	150	260	80	63	63	9
MST	25	150	270	90	70	70	11.5
MST	30	150	275	100	75	75	15
MST	50	150	290	130	100	100	27
MST	75	150	295	155	120	120	39
MST	100	150	305	180	140	140	54
MST	150	150	325	220	170	170	87.5
MST	200	150	340	255	200	200	122
MST	250	150	350	280	220	220	154
MST	300	150	370	310	240	240	202
MST	400	150	405	350	270	270	283

Note:-

- Higher capacity customized solutions on request.
- Plating or painting on demand.