

MHP

Hydraulic hand pumps




MAC
HYDRAULIC SYSTEMS



Single Acting

These pumps are generally recommended for jacks upto 30tons capacity and 150mm stroke, and it delivers constant flow

Model	Pressure Rating	Oil Displacement per Stroke	Usable Oil Volume	Oil Tank Capacity	Handle Effort	Dry Weight
	Bar	cc	Liters	Liters	kg	kg
MHP-12	700	2.8	1	1.2	40	8.5
MHP-12	700	2.8	1	1.2	40	7.6
MHP-12	700	2.8	2	2.2	40	9.5

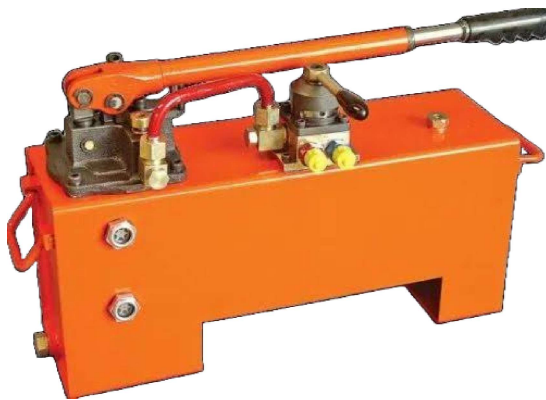

Double Acting

These pumps are generally recommend for jacks above 30 tons capacity, high lift and multiple jacking. These pumps deliver dual flow

Model	Pressure Rating		Oil Displacement		Usable Oil Volume	Oil Tank Capacity	Handle Effort	Dry Weight
	Bar		cc					
	Ist Stage	2nd Stage	Ist Stage	2nd Stage	Liters	Liters	kg	kg
MHP-30/12	15	700	17	2.5	1	1.2	47	9
MHP-30/12	15	700	49	2.5	2	2.2	47	10
MHP-50/12	30	700	49	2.8	3.5	6	40	19
MHP-50/12	30	700	49	2.8	5.6	9	40	20
MHP-50/12	30	700	49	2.8	8	12	40	21
MHP-50/12	30	700	49	2.8	8.1	12	40	24
MHP-50/12	30	700	49	2.8	12	16	40	23
MHP-50/12	30	700	49	2.8	15.6	20	40	25
MHP-50/16	35	700	49	5	8.1	12	40	21